

Programming

- Connect the power adapter to 230 VAC and to the DTI1500 power connector.
- Connect the DTI 1500 TeleTerminal to the ABP TeleTech lift alarm you want to program using one of the programming cables.
or
Connect the DTI1500 TeleTerminal to a telephone line using a standard telephone cable. (not included)
- Press “ONLINE” on the DTI1500 TeleTerminals keypad.
- Follow the programming instructions for the ABP TeleTech lift alarm you wish to program.
- When the programming is finished press “OFFLINE” on the DTI1500 TeleTerminals keypad.

Receiving calls

- Connect the DTI1500 TeleTerminal to a telephone line using a standard telephone cable (not included). Make sure that a standard telephone is connected as well so you can hear the ringing signal and if any 2-way speech is necessary.
- To receive a call press “ONLINE” on the DTI1500 TeleTerminals keypad.
- Follow the communication instructions for the ABP TeleTech lift alarm/protocol from which you are receiving the call.
- When the call is ended press “OFFLINE” on the DTI1500 TeleTerminals keypad.



TeleTerminal DTI1500

Programming and diagnostic tool



User Guide

Rev. 2.0 EN
15. June 2009

Package contents

- Qty:
1 DTI1500 TeleTerminal
1 Power adapter 230VAC - 12 VDC 1,5A
1 Programming cable for TSA5100 (X-cable)
1 Programming cable for TSA2100

Connections

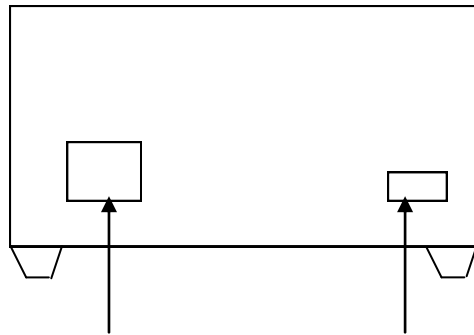


Figure 1
Rear view

Modular Jack connector for programming or telephone cable.

Power connector for the supplied power adapter cable.

Overview

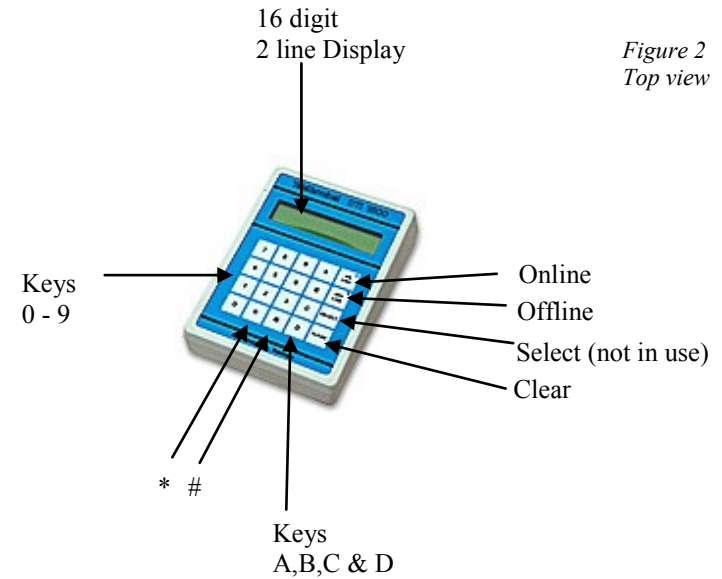


Figure 2
Top view

Using the DTI1500 Tele terminal

“Online”: Activates the DTI1500 TeleTerminal.

“Offline”: Deactivates the DTI1500 TeleTerminal.

“Clear”: Clears the display.

The DTI1500 TeleTerminal can be used for programming locally or remote. It can send and receive the DTMF tones 0-9, *,#,A,B,C & D.

The DTI1500 TeleTerminal can also be used to manually receive calls from ABP TeleTech lift alarms using different DTMF protocols.